

## 4.0" Diameter Electric Unit Heaters

115 Volt - Open - CCW Lead End Rotation

Comment: Magnetek #78

| Part #       | HP          | Amps | RPM  | Shaft       |
|--------------|-------------|------|------|-------------|
| <b>R2614</b> | <b>1/12</b> | 2.25 | 1550 | 2.0" x 3/8" |



## 5.0" Diameter - OEM Replacement


OEM Direct Replacements - Totally Enclosed - 115 Volts

### Comment:


Direct Replacement for Reznor, Luxaire, \*Lennox P8-6920, \*Keeprite 54028, A0516, A2160, E62788, E62862, E62A15, \*Robbin Myers.



**Fig. B**  
Reznor

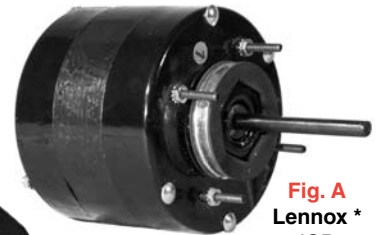

**Fig. A**  
Lennox \*  
ICP  
Keeprite

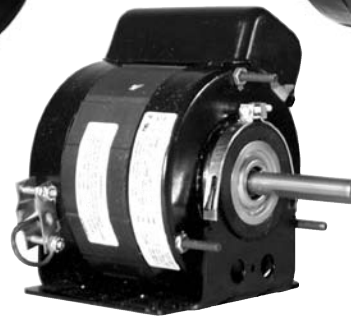


**Fig. C**  
Robbin Myers  
Reznor

| Part #        | Fig. | HP          | RPM  | Type    |
|---------------|------|-------------|------|---------|
| <b>R6920*</b> | A    | <b>1/15</b> | 1050 | SP      |
| <b>R2360</b>  | B    | <b>1/15</b> | 1050 | SP      |
| <b>R2615</b>  | B    | <b>1/8</b>  | 1050 | SP      |
| <b>R2380</b>  | C    | <b>1/8</b>  | 1075 | PSC/INC |

## 5.5" Diameter Unit Heater Motors

| Optional Base |   |
|---------------|---|
|               | <p><b>UH-UHK</b><br/>Optional Mounting Base For UH- Series Unit Heaters. Includes Base, Brackets &amp; Resilient Rings.</p> |

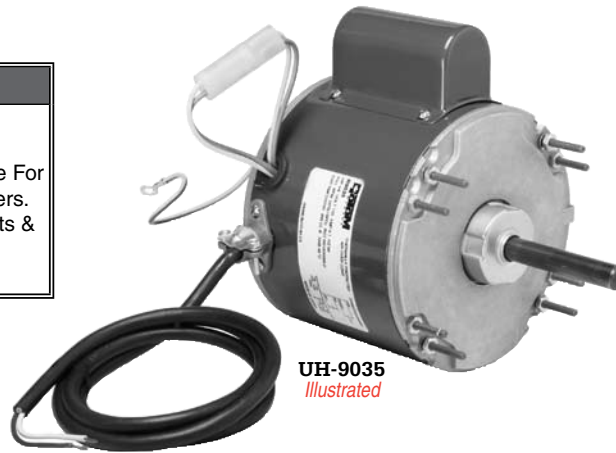

**UH-9035**  
Illustrated

### Features

- 48 Frame
- 5.5" Diameter
- Totally Enclosed
- Mounting: 4/8 Stud. Pattern
- 60 Hz
- Ball Bearing
- Shaft: 1/2" x 3.4"
- Reversible
- Permanent Split Capacitor (P.S.C.)
- 40" Black Water Resistant SJOW Cord
- 45°C (113°F) Ambient
- Insulation Class B
- Thermally Protected

### Unit Heater



| Part #         | HP         | Volts | Amps | Cap.    | RPM    | Rotation | A Dim. | Bearing | Shaft     |
|----------------|------------|-------|------|---------|--------|----------|--------|---------|-----------|
| <b>UH-9034</b> | <b>1/6</b> | 115   | 2.4  | 4/370   | 1/1075 | REV.PLUG | 4.55"  | Ball    | 1/2"x3.4" |
| <b>UH-9035</b> | <b>1/4</b> | 115   | 4.1  | 5/370   | 1/1075 | REV.PLU  | 4.52"  | Ball    | 1/2"x3.4" |
| <b>UH-9036</b> | <b>1/3</b> | 115   | 5.0  | 7.5/370 | 1/1075 | REV.     | 4.52"  | Ball    | 1/2"x3.4" |

Capacitor Included

### Comment

| Rotom          | AO Smith                 | Emerson | Fasco | GE   | Marathon   | UE            |
|----------------|--------------------------|---------|-------|------|------------|---------------|
| <b>UH-9034</b> | UH1016, US1016, US1016NB | 9034    | D834  | 3206 | X302, X306 | 177, 749      |
| <b>UH-9035</b> | UH1026, US1026, US1026NB | 9035    | D734  | 3208 | X303, X307 | 566, 734, 750 |
| <b>UH-9036</b> | UH1036, US1036, US1036NB | 9036    | D732  | 3212 | X304, X308 | 183, 751      |

Rotation determined opposite shaft end  
Double shaft determined at lead end

Shaft length measured from hub face to shaft end

**Ball Bearing**

# Unit Heater / Oil Burner



## 5.5" Diameter Unit Heater Motors

Motors

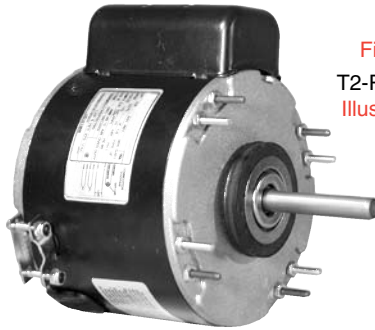


Fig. E  
T2-R12677  
Illustrated

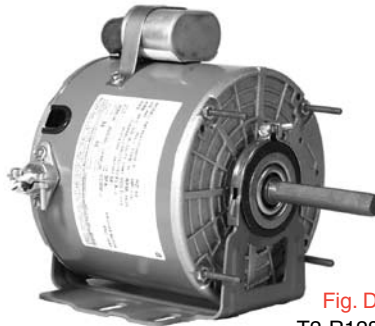



Fig. D  
T2-R12835  
Illustrated

- 48 Frame • Totally Enclosed
- 115 Volt • Reversible • PSC

| Part # | Fig.                                | HP  | RPM  | Bearing |
|--------|-------------------------------------|-----|------|---------|
| R12178 | D                                   | 1/6 | 1625 | Sleeve  |
| R12835 | D                                   | 1/6 | 1625 | Ball    |
| R12177 | D                                   | 1/6 | 1075 | Sleeve  |
| R12677 | E                                   | 1/6 | 1075 | Sleeve  |
| R12834 | D                                   | 1/6 | 1075 | Ball    |
| R12486 | D                                   | 1/4 | 1075 | Sleeve  |
| R12686 | E                                   | 1/4 | 1075 | Sleeve  |
| R12586 | D                                   | 1/4 | 1075 | Ball    |
| R182   | D                                   | 1/3 | 1075 | Sleeve  |
| R12682 | E                                   | 1/3 | 1075 | Sleeve  |
| R183   | D                                   | 1/3 | 1075 | Ball    |
| A278   | 4-Bolt Clare/ Fedders Adapter Plate |     |      |         |

## Oil Burner

- Residential and Commercial
- Reversible
- Split Phase



T4-R2097  
Illustrated

| Part # | HP    | Volts       | Amps  | RPM  | Frame |
|--------|-------|-------------|-------|------|-------|
| R6102  | 1/8   | 115         | 2.50  | 1725 | 48N   |
| R2097  | 1/8   | 115         | 2.40  | 3450 | 48N   |
| R3083  | 1/7   | 115         | 2.50  | 3450 | 48M   |
| R3250  | 1/6   | 115         | 3.20  | 1725 | 48N   |
| R3251  | 1/6   | 115         | 2.70  | 3450 | 48M   |
| R2304  | 1/5   | 115/230     | 3.00  | 3450 | 48N   |
| R3579  | 1/4   | 115         | 4.20  | 1725 | 48N   |
| R2302  | 1/4   | 115         | 4.84  | 3450 | 48N   |
| R2303  | 1/3   | 115         | 5.00  | 1725 | 48N   |
| R2211  | 1/3   | 115/208/230 | 5.60  | 3450 | 48    |
| R2305  | 1/3   | 115/230     | 5.60  | 3450 | 48N   |
| R2213  | 1/2   | 115/208/230 | 7.40  | 3450 | 56C   |
| R2306  | 1/2   | 115/230     | 7.40  | 3450 | 48N   |
| R2215  | 3/4   | 115/208/230 | 9.80  | 3450 | 56C   |
| R2217  | 1     | 115/208/230 | 9.80  | 3450 | 56C   |
| R2231  | 1 1/2 | 115/208/230 | 13.40 | 3450 | 56C   |
| R2232  | 2     | 115/208/230 | 19.20 | 3450 | 56C   |

## Oil Burner - Beckett PSC Motor

- More Reliable
- Fewer Service Calls
- 4 Year Warranty
- 48 M Frame



Beckett 21805U Replacement

| Part #  | HP  | Volts | Type | RPM  | Rotation |
|---------|-----|-------|------|------|----------|
| R21805U | 1/7 | 115   | PSC  | 3450 | CCW      |

Shaft length measured from hub face to shaft end

Rotation determined opposite shaft end  
Double shaft determined at lead end