

Evaporator Fan Motors


Sleeve Bearing - Shaded Pole



GEFM-1

Features


- Complete with hardware
- Use original fan blade
- Identical 2 or 3 point mounting

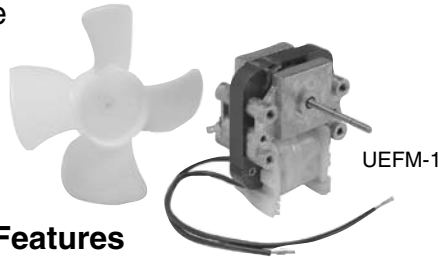

UEFM-1

Features

- Complete with fan blade (93-40421)
- Use original hardware & bracket
- Break off shaft for proper length



WIFM-1

Features

- Identical 2-point Westinghouse Mount or Whirlpool-Inglis bracket mount
- Complete with hardware and a fan hub.
- Use original fan blade
- Break off shaft for proper length.

Part #	HP	Volts	RPM	Amps	Rot	Stack	Shaft	Features	Comment
GEFM-1	1/350	115	2600	0.30	C.W.	0.50	1.5"x1/8"	2 or 3 point mounting	902065, WR60M103, WR60M113, WR60X104,108, 203, 5023
UEFM-1	1/500	115	2600	0.22	C.C.W.	0.38	1.5"x1/8"	Two C-ring grooves on shaft, 7" cord c/w bare wire leads, c/w fan blade	901293,292,241, 401767-101, WR60M111, 115, 1202159, 6494
WIFM-1	1/250	115	3000	0.40	C.C.W.	0.38	1.5"x1/8"	One C-ring groove on shaft, 7" cord c/w bare wire leads, Bracket mount c/w all hardware	WR60M109,902440 446,C289446,C38791,20141846,2 0144334

Humidifier Motors

Sleeve Bearing - Shaded Pole



71-2800

71-2897

Complete with applicable drive coupling

Part #	Watts	Volts	RPM	Amps	Features	Comment
71-2800	4	24	1	0.83	Gen. Replacement, Includes 3 shaft adapters	35,105,37,76,240,447,465,801,45S,90S,MD 035,60
71-2897	4	24	1	0.83	C/W mounting plates and 2 shaft adapters	Autoflow 97, Lennox WD2-2-0

Agitator Motors

Single Speed - CW Rotation

Part #	Amps	Volts	RPM	Body	Dia	Features	Comments	Fig
R6207	0.29	115	1550	2.10"	3.3"	With 2" Shaft Extension	Habco, C020106, C020114	1
R6287	0.47	115	1550	3.00"	3.3"	10" Leads	Habco, C020287	1
R4119	0.60	115	1550	3.50"	3.9"	Two Pin Plug, Thr. Shaft	Scotsman 15W	2
R6203	0.60	115	1550	3.50"	3.9"	Two Pin Plug	Cornelius 15W, QBD	2
R6208	0.60	115	1550	3.40"	3.9"	10" Leads	Habco C020942, 15W	2
R5713	0.60	115	1550	3.50"	3.9"	Cord & Plug	15W, CCW	2
R6209	0.60	115	1550	3.40"	3.9"	10" Leads	Habco C020943, 15W	2
R4110	0.80	115	1550	4.00"	3.9"	Two Pin Plug	Whirlpool, Frigidaire 23W	3
R6204	1.10	115	1550	3.50"	3.9"	Two Pin Plug	Cornelius 25W, QBD	2
R6205	1.10	115	1550	3.50"	3.9"	Two Pin Plug, Drive Pin	Cornelius 25W, QBD	2
R6206	1.70	115	1550	3.50"	3.9"	1.125" Flat on Shaft	Cornelius 50W, QBD	2

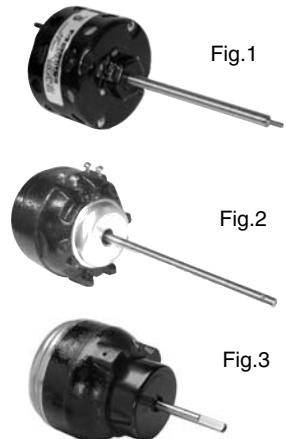


Fig.1

Fig.2

Fig.3

Rotation determined opposite shaft end
Double shaft determined at lead end

Shaft length measured from hub
face to shaft end